

CROSS CROM WITH OVERLAPPING SQUARES

design Luigi Brembilla

CROSS CROM is a chrome-plated version, for attractive compositions of no more than three overlapping elements.
Can be used as a towel-heater, or simply a decorative feature in any room.



CROSS CROM 88-120

MODEL	HL cm	Chrome-plated standard €	Δt 50 K watt	EN 442 Δt 40 K watt	Δt 30 K watt	▲ ▼ t.c. cm	Height H (H ₁) cm	Width L (L ₁) cm	Weight M Kg	Volume V dm ³	DUAL FUEL VERSION with E.H.E. and sleeve Watt €	
CROSS CROM	48-88	1790,00	339	256	179	43	48 (24)	88 (48)	7,9	4,8	300	126,20
CROSS CROM	48-128	2484,90	533	402	281	99	48 (24)	128 (104)	12,8	7,7	500	129,60
CROSS CROM	56-88	1863,60	369	279	195	51	56 (32)	88 (56)	8,6	5,2	400	127,40
CROSS CROM	56-152	2693,70	648	489	342	115	56 (32)	152 (120)	15,6	9,4	650	131,80
CROSS CROM	64-96	2021,70	413	312	218	59	64 (32)	96 (64)	9,7	5,9	400	127,40
CROSS CROM	64-168	2817,40	758	572	400	131	64 (32)	168 (136)	17,6	10,7	800	136,60
CROSS CROM	88-48	1756,80	339	256	179	37	88	48 (24)	7,9	4,8	400	127,40
CROSS CROM	88-56	1828,50	369	279	195	45	88	56 (32)	8,6	5,2	400	127,40
CROSS CROM	88-120	2188,40	531	401	280	69	88	120 (56)	12,4	7,5	500	129,60
CROSS CROM	128-48	2465,20	511	386	270	37	128	48 (24)	12,8	7,7	500	129,60
CROSS CROM	128-56	2573,90	538	406	284	45	128	56 (32)	13,5	8,2	500	129,60
CROSS CROM	152-56	2670,40	621	469	328	45	152	56 (32)	15,6	9,4	650	131,80
CROSS CROM	168-64	2786,80	733	553	387	45	168	64 (32)	18,7	11,3	650	131,80
CROSS CROM	184-48	3543,90	712	538	376	37	184	48 (24)	18,7	11,3	650	121,30
CROSS CROM	184-56	3695,80	880	664	465	45	184	56 (32)	20,0	12,1	800	125,70

Drawings page 64

Thermostats p.208-209

STANDARD PRODUCTION

Chrome-plated B35 brackets and finishing
Tolerance ± 3mm - Air vent ø 1/8"


MAXIMUM OPERATING PRESSURE 4 BAR

PRODUCTION ON REQUEST

Made-to-measure dimensions
B70 brackets for 13 cm depth from wall
Electric version e.Cross Crom, page 243


STANDARD FITTING

REG ø 1/2"
On request fitting ø 3/8"
Special fittings, page 287




TAPPING CENTRES


Horizontal Models

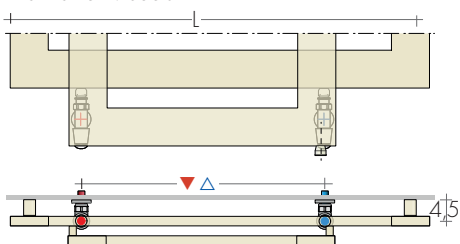


Vertical Models

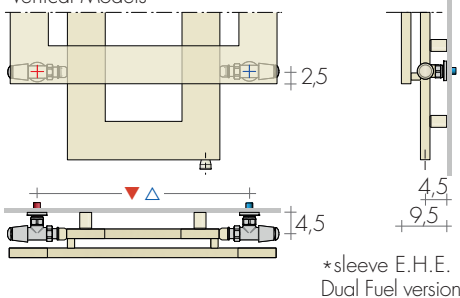

CROSS-QD

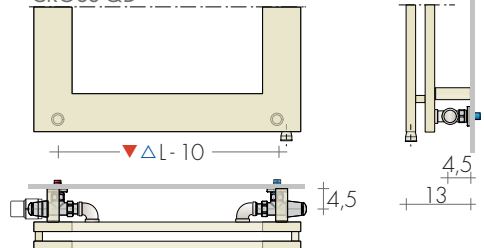

On request fittings EG ▲▽ L-10 cm without extra.
Visible valves with lateral control and depth 9.5 cm

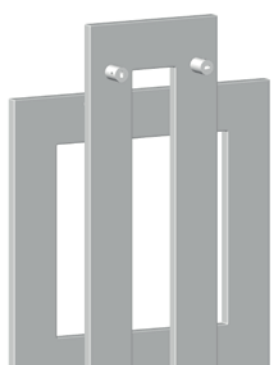


B35 FIXINGS
Brackets included
position page 64

RECOMMENDED VALVES


CHROME VALVES KIT with:

- n°2 Valves with tailpieces
- n°2 Fittings (multilayer ø 16, copper ø 12, 14)
- n°2 Chrome wall plates ø 48, hole ø 16




REVERSE QUADRA VALVES KIT
page 271 Art. KQR
Extra for BREM color list

180,10€
53,40€




REVERSE CYL VALVES KIT with thermostatic option,
page 273 Art. KCR 149,90€
Extra for BREM color list

53,40€



REMOTE FITTINGS Art. REM 42,10€
horizontal models tapping centres ▲▽ L- 6cm
vertical models L¹ - 6cm
DISTANT Valves page 274




REVERSE TON VALVES KIT with THERMOSTATIC
Head page 273 Art. KTR 190,30€






CROSS-Q 184-48

CROSS-Q TECHNICAL DRAWINGS

(for overlapping squares) TAPPING CENTRES AND FIXINGS

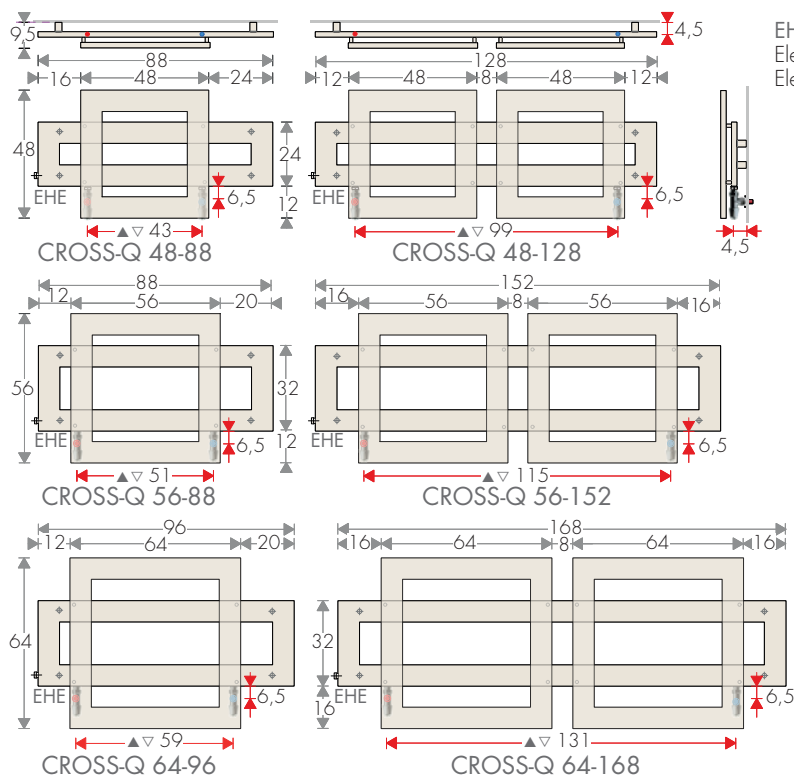


EHE: sleeve for
Electric Heating
Element (on request)

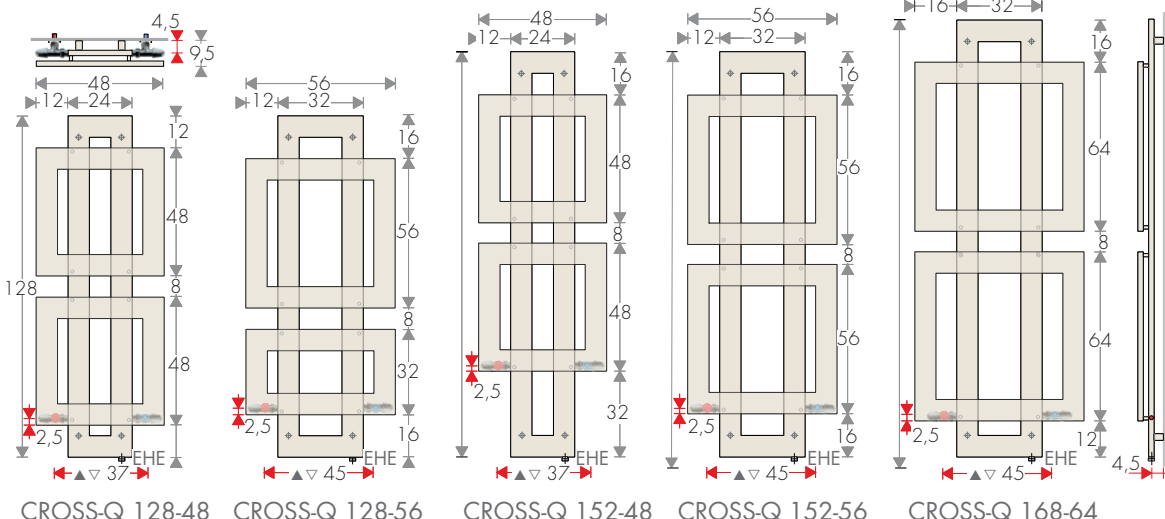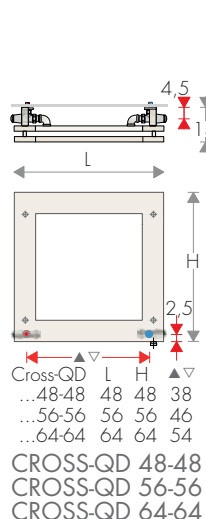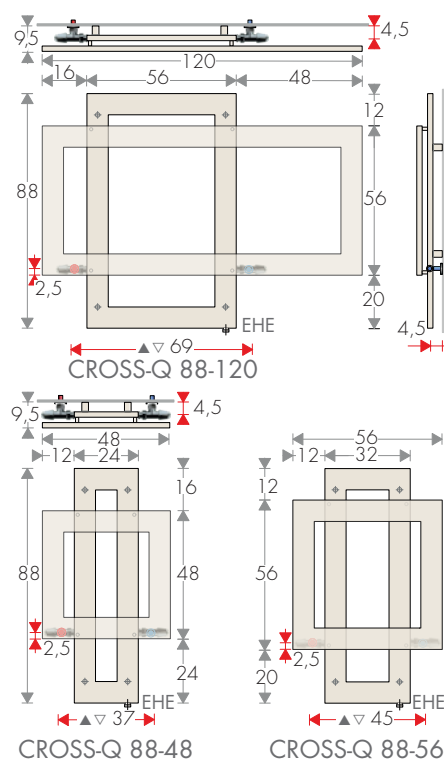


BRACKETS POSITION


HORIZONTAL models



VERTICAL models



TAPPING CENTRES with REVERSE VALVES

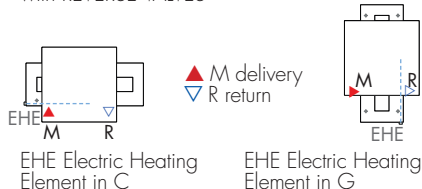

Missing models:
Request technical sheet

