

# CROSS-Q WITH OVERLAPPING SQUARES

design Luigi Brembilla

Large, variously assembled, rectangular tubes are used to produce CROSS-Q.

Innovative radiators thanks to 90° corners and strong geometric shapes (squares and

rectangles) sitting on top of each other.

## DIMENSIONS


Width: 48/56/64/100/116 cm

Height: 170/186/202/226/230 cm

Depth: 6 / 7 cm

Depth from wall: 9,5 cm

TECHNICAL DRAWINGS on request

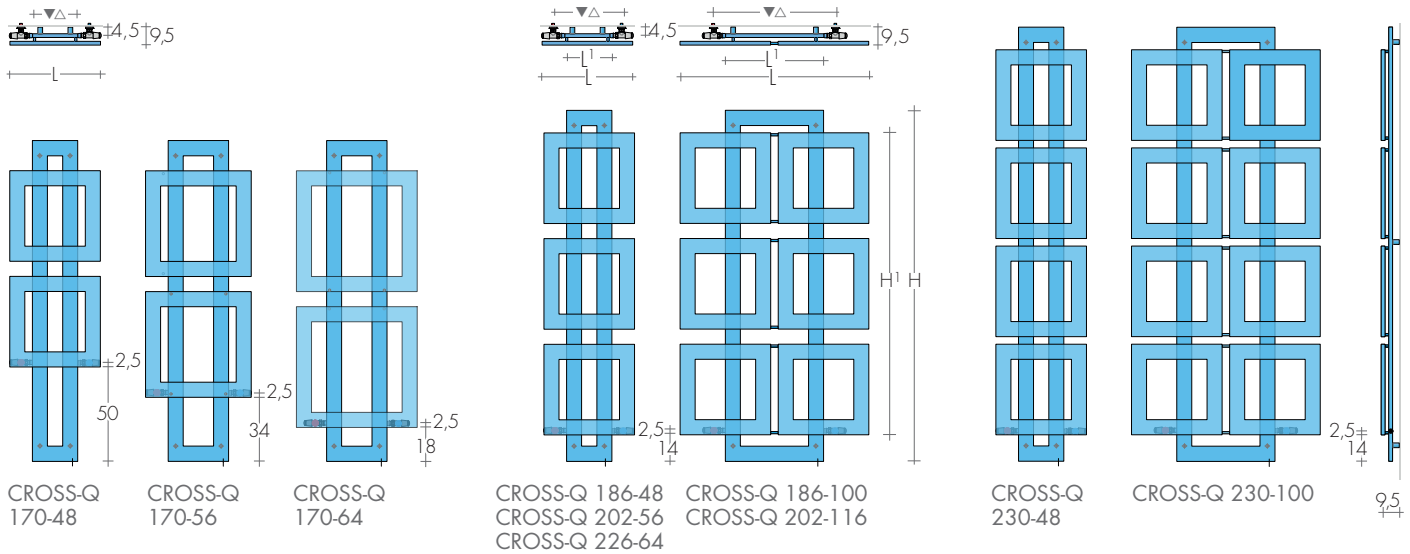

## MODEL'25

|         | H-L<br>cm | Standard white<br>sablé SB9016<br>€ | Δt 50 K<br>watt | EN 442<br>Δt 40 K<br>watt | Δt 30 K<br>watt | ▲ ▼<br>t.c.<br>cm | Height<br>H (H1)<br>cm | Width<br>L (L1)<br>cm | Weight<br>M<br>Kg | Volume<br>V<br>dm³ | DUAL FUEL VERSION<br>with E.H.E. and sleeve<br>Watt € |        |
|---------|-----------|-------------------------------------|-----------------|---------------------------|-----------------|-------------------|------------------------|-----------------------|-------------------|--------------------|-------------------------------------------------------|--------|
| CROSS-Q | 170-48    | 1244,20                             | 711             | 537                       | 374             | 37                | 170 (104)              | 48 (24)               | 14,2              | 8,8                | 650                                                   | 131,80 |
| CROSS-Q | 170-56    | 1290,40                             | 795             | 600                       | 418             | 45                | 170 (120)              | 56 (32)               | 15,9              | 9,9                | 800                                                   | 136,60 |
| CROSS-Q | 170-64    | 1333,00                             | 863             | 652                       | 454             | 45                | 170 (136)              | 64 (32)               | 17,2              | 10,7               | 900                                                   | 140,20 |
| CROSS-Q | 186-48    | 1310,20                             | 894             | 675                       | 470             | 37                | 186 (160)              | 48 (24)               | 18,7              | 11,3               | 900                                                   | 140,20 |
| CROSS-Q | 186-100   | 2132,50                             | 1446            | 1092                      | 761             | 65                | 186 (160)              | 100 (52)              | 30,2              | 18,3               | 1500                                                  | 159,40 |
| CROSS-Q | 202-56    | 1374,60                             | 1026            | 775                       | 557             | 45                | 202 (176)              | 56 (32)               | 22,1              | 13,4               | 1200                                                  | 148,50 |
| CROSS-Q | 202-116   | 2245,60                             | 1677            | 1266                      | 892             | 65                | 202 (176)              | 116 (52)              | 35,4              | 21,5               | 1500                                                  | 159,40 |
| CROSS-Q | 226-64    | 1440,00                             | 1174            | 886                       | 635             | 45                | 226 (200)              | 64 (32)               | 25,2              | 15,3               | 1200                                                  | 148,50 |
| CROSS-Q | 230-48    | 1579,50                             | 1138            | 859                       | 593             | 37                | 230 (204)              | 48 (24)               | 24,0              | 14,6               | 1200                                                  | 148,50 |
| CROSS-Q | 230-100   | 2667,20                             | 1830            | 1382                      | 964             | 65                | 230 (204)              | 100 (52)              | 39,1              | 23,7               | -                                                     | -      |

Thermostats p.208-209

## STANDARD PRODUCTION

White sablé SB9016 paintwork - B35 brackets  
Tolerance ± 3mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 4 BAR

## PRODUCTION ON REQUEST

Paintwork to Brem color list with colored  
brackets B35


Electric version e.CROSS-Q, p.221

## STANDARD FITTING


REG ø 1/2"

On request fitting ø3/8"


Special fittings, page 278



## TAPPING CENTRES CROSS-Q

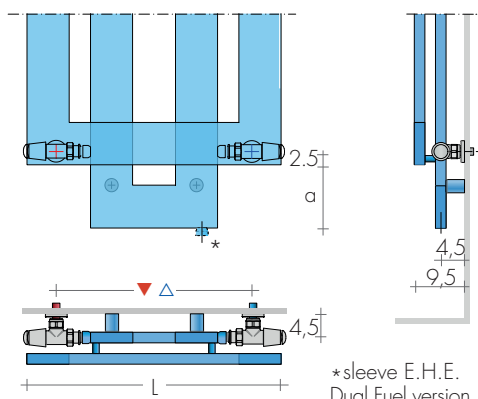

CROSS 170-48  $a=50$   
CROSS 170-56  $a=34$   
CROSS 170-48  $a=18$   
CROSS from 186...  $a=14$

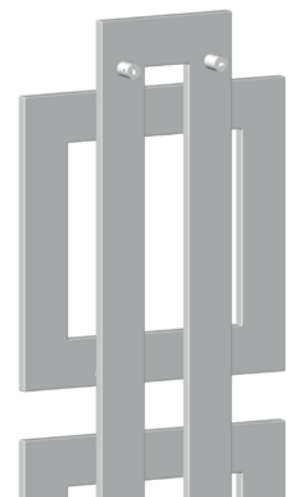

**FIXINGS**  
Brackets B35  
included




CROSS-Q 186-100

## RECOMMENDED VALVES

CHROME VALVES KIT with:

- n°2 Valves with tailpieces
- n°2 Fittings (multilayer  $\varnothing 16$ , copper  $\varnothing 12, 14$ )
- n°2 Chrome wall plates  $\varnothing 48$ , hole  $\varnothing 16$



REVERSE VALVES QUADRA KIT  
page 271 Art. KQR

180,10€  
53,40€

SPECIAL FINISHES

Finishes Gold, Bronze, Brushed Nickel for 2 valves  
Brushed Nickel FITTING KIT extra Art. RN 30,50€

page 267




REVERSE CYL VALVES KIT with THERMOSTATIC  
option, page 273 Art. KCR 149,90€  
Extra for BREM color list 53,40€

REMOTE FITTINGS

Tapping centres at the rear:  $\triangle \nabla L^1 - 6\text{cm}$   
DISTANT Valves page 274

Art. REM

42,10€



REVERSE VALVES TON KIT with THERMOSTATIC  
Head, page 273 Art. KTR 190,30€