

KUO is an original take on Japanese formalism and essential lines.

Its pure form is the result of using a flat plate with vertical elements laid down its

*design Davide Brembilla*  
sides to limit the space and give a sense of slimness and vertical continuity.


# DIMENSIONS

Width: 25/35/49 cm

Height: 110/140/180 cm

Depth: 8 cm

Depth from wall: 12 cm

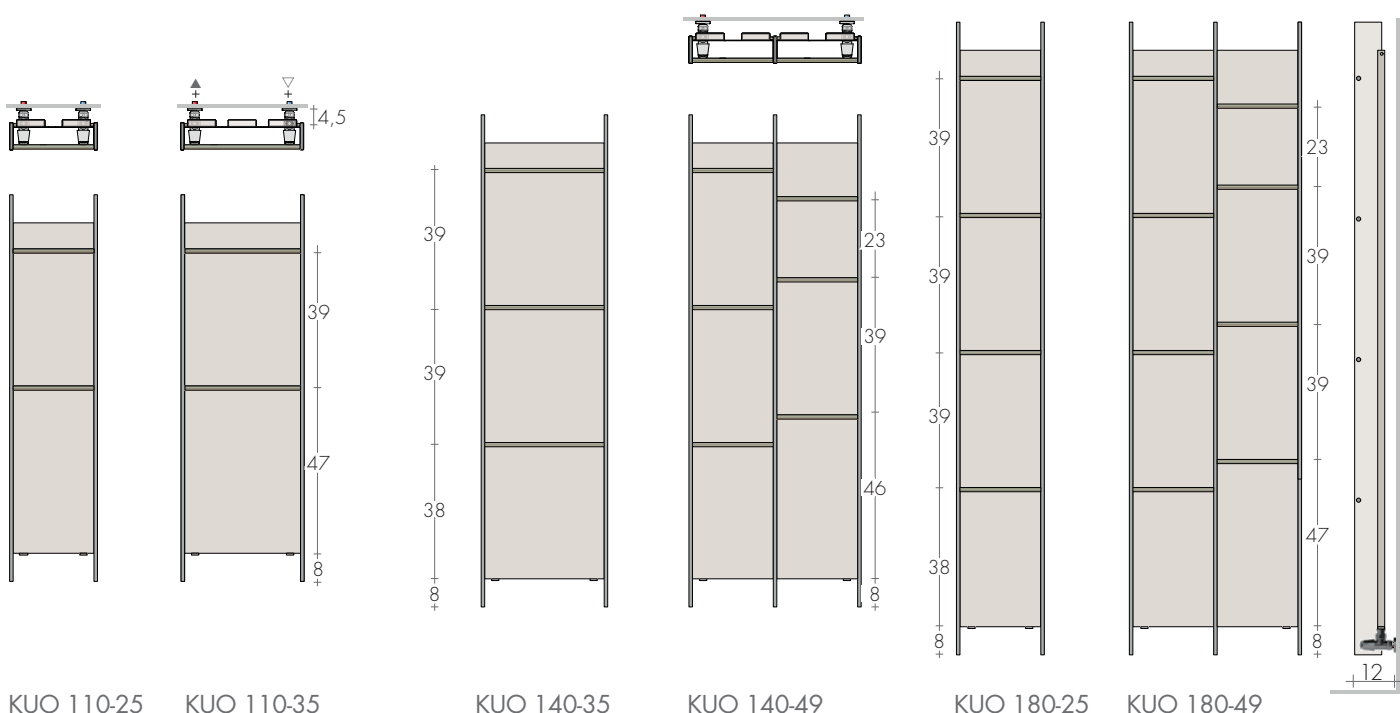

| MODEL      | HL<br>cm | Standard<br>white sablé<br>€ | EN 442<br>$\Delta t$ 50 K<br>watt | $\Delta t$ 30 K<br>watt | $\Delta \nabla$<br>t.c.<br>cm | Height<br>H<br>cm | Width<br>L<br>cm | Weight<br>M<br>Kg | Volume<br>V<br>dm <sup>3</sup> | MIXED version (EHE cl.II) with sleeve and:<br>cable <sup>o</sup><br>€ | W<br>digital thermostat<br>€ |
|------------|----------|------------------------------|-----------------------------------|-------------------------|-------------------------------|-------------------|------------------|-------------------|--------------------------------|-----------------------------------------------------------------------|------------------------------|
| KUO 110-25 | 110      | 489,40                       | 387                               | 204                     | 17                            | 110               | 25               | 8,2               | 3,8                            | 110,80                                                                | 400                          |
| KUO 110-35 | 110      | 550,50                       | 475                               | 251                     | 27                            | 110               | 35               | 10,1              | 4,5                            | 112,70                                                                | 500                          |
| KUO 140-25 | 140      | 560,00                       | 501                               | 264                     | 17                            | 140               | 25               | 10,6              | 5,0                            | 112,70                                                                | 500                          |
| KUO 140-35 | 140      | 642,00                       | 616                               | 325                     | 27                            | 140               | 35               | 13,1              | 5,8                            | 114,60                                                                | 650                          |
| KUO 140-49 | 140      | 892,30                       | 873                               | 461                     | 41                            | 140               | 49               | 18,6              | 9,1                            | 121,90                                                                | 900                          |
| KUO 180-25 | 180      | 700,40                       | 652                               | 344                     | 17                            | 180               | 25               | 13,8              | 6,4                            | 114,60                                                                | 650                          |
| KUO 180-35 | 180      | 839,20                       | 801                               | 423                     | 27                            | 180               | 35               | 17,0              | 7,5                            | 121,90                                                                | 900                          |
| KUO 180-49 | 180      | 1020,10                      | 1135                              | 599                     | 41                            | 180               | 49               | 24,2              | 11,8                           | 129,20                                                                | 1200                         |

Made to measure dimensions, ask for feasibility

Ready Stock

$\Delta t$  40K = W  $\Delta t$  50K x 0,755

<sup>o</sup>Radio frequency chronothermostat p.227

## STANDARD PRODUCTION

White "sablé" paintwork - Brackets B35

Tolerance  $\pm 3$ mm - Air vent  $\varnothing 1/8"$

MAXIMUM OPERATING PRESSURE 4 BAR

## PRODUCTION ON REQUEST

Paintwork to Brem color list with colored

brackets B35

Electric version e.Kuo, p.262

## STANDARD FITTING


EG  $\varnothing 1/2"$

On request fittings  $\varnothing 3/8"$



Special fittings, p. 287



### TAPPING CENTRES

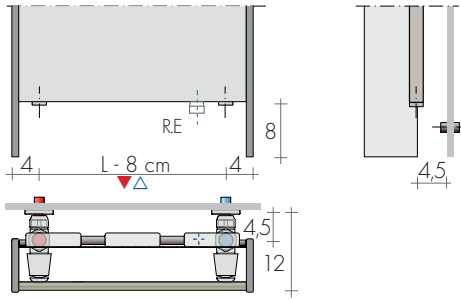

### MIXED VERSIONS

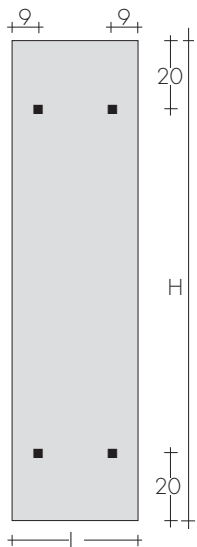


**FIXINGS**  
Brackets included

### RECOMMENDED VALVES

#### CHROME PLATED VALVES KIT WITH:

- n°2 Valves with O-ring Tangs
- n°2 Fittings (multilayer ø16, copper ø12,14)
- n°2 Round washers

On request: Polished stainless tube cover  
(to be cut to right size) Art. CA18 10,80€



#### ANGLED QUADRA VALVES KIT

page 279  
extra for BREM color list

Art. KQS

156,60€


46,40€

#### ANGLED MINI VALVES KIT

chrome-plated or white color Art. KMS

page 278

107,80€

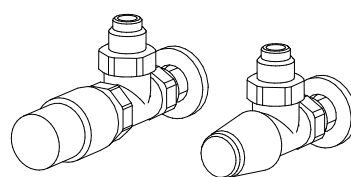

#### ANGLED TON VALVES KIT with THERMOSTATIC head

Art. KTS 165,50€

#### ANGLED TON VALVES KIT



page 277

Art. KLS 119,20€

#### REMOTE FITTINGS

Art. REM 36,60€

Remote fittings at the rear: ▲▽L - 8cm



REMOTE VALVES ASSEMBLY KIT p.281 with:  
- n°2 Fittings (multilayer ø16, copper ø12,14)

#### REMOTE QUADRA VALVES ASSEMBLY KIT

Art. KQG 167,70€

#### REMOTE TON VALVES ASSEMBLY KIT with

THERMOSTATIC head Art. KVG 199,80€



KUO 180-25