

LAME-UP

LAME-Up is free-standing radiator designed by Davide Brembilla, its heating body

acting like a totem pole in the centre of a room. The fins, arranged vertically, produce


design Davide Brembilla
a new, versatile and highly functional way to exploit the available volumes.

DIMENSIONS


H from floor: 200 / 230 cm

L: 15 cm


Depth: 19 / 23 / 27 / 31 cm




LAME-UP 4




LAME-UP 5




LAME-UP 6



LAME-UP 7



LAME-UP 8

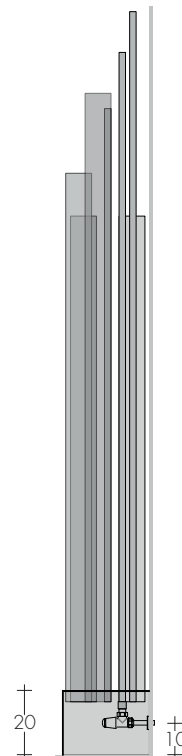

MODEL	H - n° cm tubes	Standard white sablé SB 9016 €	Δt 50 K watt	EN 442			▲ ▼ t.c. cm	Height cm	Width cm	Depth cm	Weight M Kg	Volume V dm³	EN 442 Watt Δt 50K (Δt 40K = Wx0,755 - Δt 30K = Wx0,526)	
				Δt 40 K watt	Δt 30 K watt								DUAL FUEL VERSION with E.H.E. and sleeve Watt €	
LAME-UP 200-4	200-4	1032,60	641	473	333	9	9	200	15	19	18,9	8,0	650	131,80
LAME-UP 200-5	200-5	1279,00	809	597	421	9	9	200	15	23	23,7	10,1	800	136,60
LAME-UP 200-6	200-6	1449,80	935	690	486	9	9	200	15	27	27,3	11,7	900	140,20
LAME-UP 200-7	200-7	1645,30	1082	799	563	9	9	200	15	27	31,5	13,5	-	-
LAME-UP 200-8	200-8	1862,70	1250	923	650	9	9	200	15	31	36,3	15,6	1200	148,50
LAME-UP 230-4	230-4	1119,20	767	566	399	9	9	230	15	19	22,5	9,6	800	136,60
LAME-UP 230-5	230-5	1381,20	966	713	502	9	9	230	15	23	28,2	12,0	900	140,20
LAME-UP 230-6	230-6	1572,40	1124	830	584	9	9	230	15	27	32,7	14,0	1200	148,50
LAME-UP 230-7	230-7	1782,50	1302	961	677	9	9	230	15	27	37,8	16,2	1200	148,50
LAME-UP 230-8	230-8	2010,00	1502	1108	781	9	9	230	15	31	43,5	18,7	1500	159,40

► Available in Stock

Δt different from 50 K: consult technical data Brem

Thermostats p.208-209

FREESTANDING VERSION

Fittings on floor (t.c. ▲ ▼ 9 cm)

e.g. LAME-UP 200-4, EG ø 1/2", SB9005

Extra

Art. Lame-UPC 136,90€

STANDARD PRODUCTION

White "sablé" SB9016 paintwork

Tolerance ± 3mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 4 BAR

PRODUCTION ON REQUEST

Paintwork to Brem color list +15/25%

n.1 spotlight LED 1 W Art. F.LED1 65,00€

n.2 spotlight LEDS 1 W Art. F.LED2 108,20€

STANDARD FITTINGS

EG ø 1/2"











Electric version e.lame-UP p. 243



TAPPING CENTRES ▲▽ = 9 cm

Standard position
on the short side

Position on the long side
Art. LAME-UPL 72,50€
(extra)



- Delivery
- Return
- Electric Heating Element
- LED on request




LAME-UP 200-4

RECOMMENDED VALVES

CHROME VALVES KIT with:

- n°2 Valves with tailpieces
- n°2 Fittings (multilayer ø16, copper ø12, 14)
- n°2 Chrome wall plates ø 48, hole ø16



ANGLED MINI VALVES KIT
Art. KMS

page 270
124,00€

WALL POSITION
with angled valves



FREESTANDING POSITION
Art. LAME-UPC with straight valves

