

A particularly iconic product, its curved 25 mm diameter tubes have been assembled

and welded to form box shapes with an attractive diagonal cross in the centre.

We report the main measures for use in the bathroom.

DIMENSIONS:


Lengths: from 50 to 157 cm

Heights: from 50 to 210 cm


Depth: 10 cm

Depth from wall: 13,5 cm

HORIZONTAL MODELS

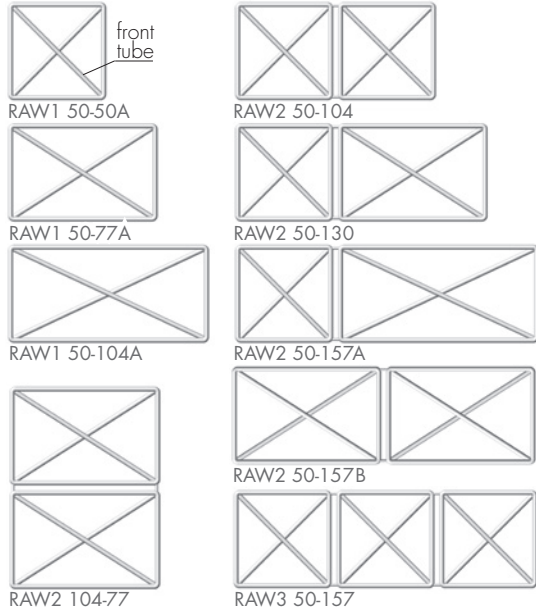

VERTICAL MODELS

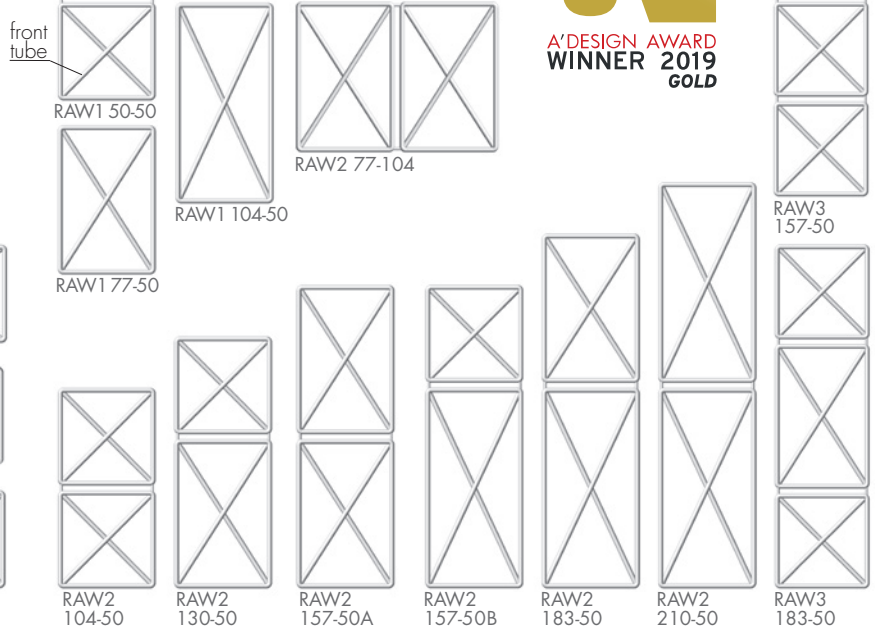

MODEL 50

	HL	white sablé	Δt 50 K	Δt 30 K	t.c.	H	L	M	V	cable ^o	digital thermostat	
HORIZONTAL	cm	€	watt	watt	cm	cm	cm	Kg	dm³	€	W	€
RAW1	50-50A	524,20	287	153	42	50,5	50,5	4,4	2,1	108,80	250	171,10
RAW1	50-77A	605,70	356	189	68,5	50,5	77	5,5	2,7	110,80	400	173,10
RAW1	50-104A	675,60	421	224	95	50,5	103,5	6,7	3,3	110,80	400	173,10
RAW2	50-104	873,60	578	308	95	50,5	103,5	8,8	4,3	114,60	650	176,90
RAW2	50-130	926,00	647	344	121,5	50,5	130	9,9	4,9	114,60	650	176,90
RAW2	50-157A	978,40	712	379	148	50,5	156,5	11,1	5,5	114,60	650	176,90
RAW2	50-157B	978,40	717	381	148	50,5	156,5	11,1	5,4	114,60	650	176,90
RAW2	104-77	978,40	720	383	68,5	103,5	77	11,1	5,4	118,80	800	181,10
RAW3	50-157	1223,00	868	462	148	50,5	156,5	13,2	6,4	121,90	900	184,20
VERTICAL												
RAW1	50-50	524,20	287	153	42	50,5	50,5	4,4	2,1	108,80	250	171,10
RAW1	77-50	605,70	356	189	42	77	50,5	5,5	2,7	110,80	400	173,10
RAW1	104-50	675,60	421	224	42	103,5	50,5	6,7	3,3	110,80	400	173,10
RAW2	77-104	978,40	717	381	95	77	103,5	11,1	5,4	118,80	800	181,10
RAW2	104-50	873,60	578	308	42	103,5	50,5	8,8	4,3	112,70	500	175,00
RAW2	130-50	926,00	647	344	42	130	50,5	9,9	4,9	114,60	650	176,90
RAW2	157-50A	978,40	712	379	42	156,5	50,5	11,1	5,4	118,80	800	181,10
RAW2	157-50B	978,40	717	381	42	156,5	50,5	11,1	5,4	118,80	800	181,10
RAW2	183-50	1007,60	782	416	42	183	50,5	12,3	6,0	118,80	800	181,10
RAW2	210-50	1048,30	846	450	42	209,5	50,5	13,5	6,6	121,90	900	184,20
RAW3	157-50	1223,00	868	462	42	156,5	50,5	13,2	6,4	121,90	900	184,20
RAW3	183-50	1246,30	938	499	42	183	50,5	14,3	7,0	121,90	900	184,20

Other dimensions, page 170

Ready Stock


(Δt 40K = W Δt 50Kx0,755)

*Electric Heating Element

^oRadio frequency chronothermostat p.227

MIXED VERSION*

EG fittings ▲ ▽ 5 cm



STANDARD PRODUCTION

White "sablé" paintwork - white B35 brackets

Tolerance ± 3mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 8 BAR

PRODUCTION ON REQUEST

Paintwork to BREM color list with

colored brackets

Electric version, e.RAW, page 263


+15/25%

STANDARD FITTING



EG ø 1/2"

Fittings AC or BD on request

Special fittings, page 287



EG vertical standard fittings
Side fittings, on request without extra

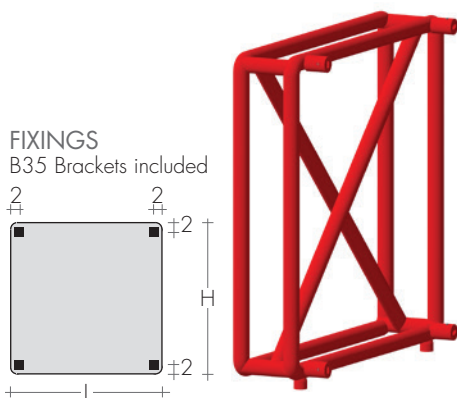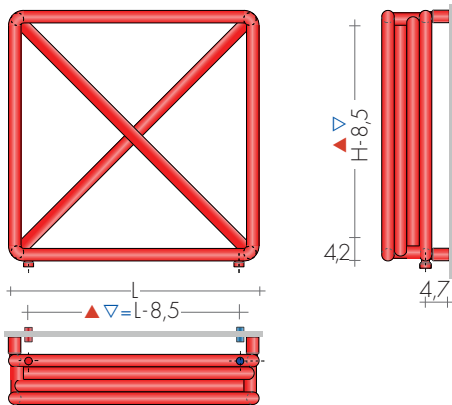


RECOMMENDED VALVES

CHROME PLATED VALVES KIT WITH:

- n°2 Valves with Oring Tangs
- n°2 Fittings (multilayer ø16, copper ø12,14)
- n°2 Round washers


On request: Polished stainless tube cover
(to be cut to right size) Art. CA18 10,80€



ANGLED MINI VALVES KIT page 278
chrome-plated or white color Art. KMS 107,80€

ANGLED QUADRA VALVES KIT

page 279	Art. KQS	156,60€
	extra for BREM color list	46,40€

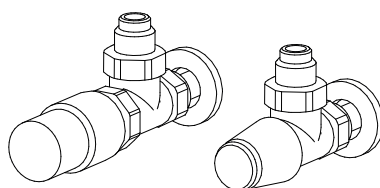

ANGLED TON VALVES KIT with
THERMOSTATIC head Art. KTS 165,50€

REMOTE FITTINGS

Remote fittings at the rear: ▲▽ EG

Remote fittings at the rear: ▲▼ EG



REMOTE VALVES ASSEMBLY KIT p. 281 with:
- n°2 Fittings (multilayer ø16, copper ø12, 14)

REMOTE TON VALVES ASSEMBLY KIT

Art. KVG 153,60€

REMOTE TON VALVES ASSEMBLY KIT with
THERMOSTATIC head Art. KVG T 199,80€