

design Luigi Brembilla

Like looking out of a window or down a stairwell. Spaces that get smaller and smaller,

forming a 3D frame that both heats and decorates. Spaces that create an absolutely

novel radiator that will never go unobserved: only later is it discovered and remarked upon.




## DIMENSIONI

Larghezze: 48/56/64/80/96/112 cm


Altezze: 48/56/64/80/96/128/176 cm

Profondità: 14/24 cm


Sporgenza dal muro 17,5/27,5 cm




VISION-.. 48-48  
VISION-.. 56-56  
VISION-.. 64-64  
E.H.E.




VISION-.. 48-80  
VISION-.. 56-96  
VISION-.. 64-112




VISION-ST.. 80-48

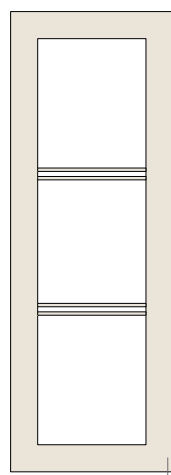

VISION-ST.. 128-..



VISION-ST.. 176-..



MODEL	HL cm	white sablé standard €	EN 442		▲ ▽ t.c. cm	Height H cm	Width L cm	Depth P cm	Weight M Kg	Volume V dm³	MIXED version (EHE cl.II) with sleeve and: digital thermostat		
			Δt 50 K watt	Δt 30 K watt							Δt 40K = W Δt 50Kx0,755	radio frequency chronothermostat p.227 cable <sup>o</sup> €	W
VISION-1	48-48	594,60	322	172	27	48	48	14	6,4	3,9	110,80	400	173,10
VISION-2	48-48	818,70	462	246	27	48	48	24	9,3	5,7	112,70	500	175,00
VISION-1	56-56	619,10	391	208	35	56	56	14	7,8	4,7	110,80	400	173,10
VISION-2	56-56	885,00	565	301	35	56	56	24	11,4	6,9	112,70	500	175,00
VISION-1	64-64	671,30	461	246	43	64	64	14	9,2	5,6	112,70	500	173,10
VISION-2	64-64	924,70	667	356	43	64	64	24	13,5	8,2	114,60	650	175,00
VISION-1	48-80	681,20	461	246	59	48	80	14	9,2	5,6	112,70	500	173,10
VISION-2	48-80	943,30	667	356	59	48	80	24	13,5	8,2	114,60	650	175,00
VISION-1	56-96	725,90	565	301	75	56	96	14	17,1	10,4	112,70	500	173,10
VISION-2	56-96	1015,40	821	438	75	56	96	24	28,3	17,2	114,60	650	175,00
VISION-1	64-112	783,40	669	357	91	64	112	14	20,2	12,3	114,60	650	175,00
VISION-2	64-112	1084,80	975	520	91	64	112	24	33,5	20,3	121,90	900	184,20
VISION-1ST	80-48	775,20	475	251	27	80	48	14	9,2	5,6	112,70	500	173,10
VISION-2ST	80-48	1086,70	681	360	27	80	48	24	13,5	8,2	114,60	650	175,00
VISION-1ST	128-56	975,70	745	393	35	128	56	14	15,4	9,2	118,80	800	181,10
VISION-2ST	128-56	1317,00	1067	563	35	128	56	24	22,4	13,5	121,90	900	184,20
VISION-1ST	176-48	1132,00	926	489	27	176	48	14	18,3	10,9	121,90	900	184,20
VISION-2ST	176-48	1525,90	1321	703	27	176	48	24	26,7	16,0	129,20	1200	191,50

▶ Ready in stock

Δt 40K = W Δt 50Kx0,755

◊Radio frequency chronothermostat p.227

## STANDARD PRODUCTION

White "sablé" paintwork - B35 brackets

Tolerance ± 3 mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 4 BAR

## PRODUCTION ON REQUEST

Paintwork to Brem color list with

colored B35 brackets

Electric version e.Vision, page 252

+15/25%

## STANDARD FITTING



REG ø 1/2"

On request fitting ø3/8"

Special fittings page 287



TAPPING CENTRES

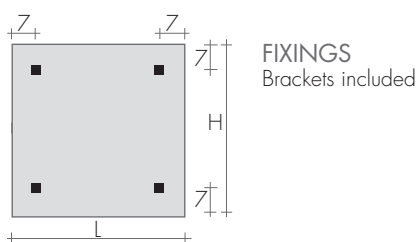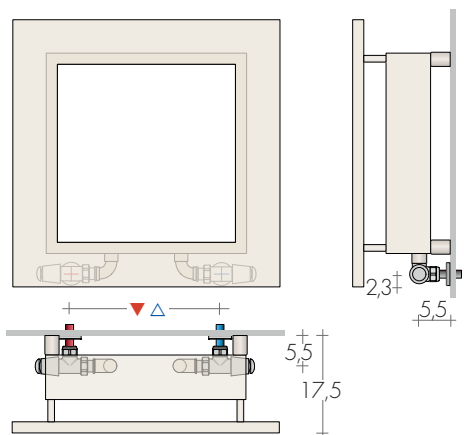


RECOMMENDED VALVES

as standard at the rear of the radiator

CHROME PLATED VALVES KIT WITH:

- n°2 Valves with O-ring Tangs
- n°2 Fittings (multilayer ø16, copper ø12,14)
- n°2 Round washers

On request: Polished stainless tube cover  
(to be cut to right size) Art. CA18 10,80€

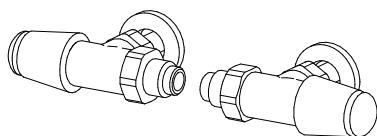

- REVERSE TON VALVES KIT Art. KVR 119,20€
- REVERSE TON VALVES KIT with THERMOSTATIC head Art. KTR 165,50€



VISION-1 48-48



VISION-2ST 128-56