

design Luigi Brembilla

QUAR: an original heated towel rail with a pure geometrical expression.

In QUAR, the tube is square, not round. A large rectangular section frame replaces

the usual manifolds while increasing heat output at the same time.








DIMENSIONS

Width: 30,5 / 38,5 / 46,5 / 54,5 / 62,5 cm

Height: 97,5 / 127,5 / 157,5 / 180 cm

Depth: 2 cm / Quar-P 8,5 cm

Depth from wall : 9 cm / Quar-P 10 cm

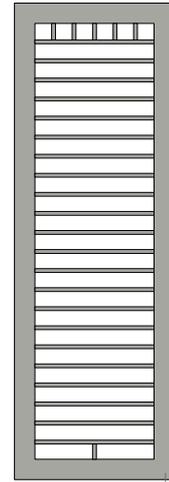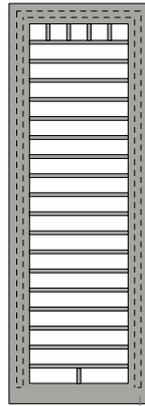

QUAR 97..

QUAR 127..

QUAR.. 157..

QUAR.. 180-30

QUAR.. 180..

MODEL	H-L cm	Standard white sablé SB9016 €	EN442			▲▽ t.c. cm	Height H cm	Width L cm	Weight M Kg	Volume V dm³	DUAL FUEL VERSION with E.H.E. and sleeve	
			Δt 50 K watt	Δt 40 K watt	Δt 30 K watt						Watt	€
QUAR	97-46	868,10	364	276	193	19	97,5	46,5	6,7	3,9	400	127,40
QUAR	97-54	884,70	403	306	214	19	97,5	54,5	7,4	4,2	400	127,40
QUAR	127-38	917,50	415	315	220	19	127,5	38,5	7,7	4,5	400	127,40
QUAR	127-46	936,50	463	351	245	19	127,5	46,5	8,5	4,9	500	129,60
QUAR	127-54	954,90	510	387	270	19	127,5	54,5	9,4	5,3	500	129,60
QUAR	157-38	1018,00	506	384	268	19	157,5	38,5	9,4	5,4	500	129,60
QUAR	157-54	1060,90	617	468	327	19	157,5	54,5	11,3	6,3	650	131,80
QUAR	157-62	1082,90	673	511	357	19	157,5	62,5	12,3	6,8	650	131,80
QUAR-P	157-46	1296,00	832	631	441	19	157,5	46,5	17,0	10,1	800	136,60
QUAR-P	157-54	1318,00	895	679	474	19	157,5	54,5	18,1	10,6	900	140,20
QUAR	180-30	1109,40	512	389	271	19	180	30,5	9,6	5,6	500	129,60
QUAR	180-46	1156,50	637	483	338	19	180	46,5	11,7	6,6	650	131,80
QUAR	180-54	1180,50	699	531	370	19	180	54,5	12,8	7,1	650	131,80
QUAR	180-62	1204,60	761	578	403	19	180	62,5	13,9	7,6	800	136,60
QUAR-P	180-30	1366,60	808	613	428	19	180	30,5	16,8	10,2	800	125,70
QUAR-P	180-38	1388,70	877	666	465	19	180	38,5	18,1	10,8	900	129,00
QUAR-P	180-62	1461,80	1091	828	578	19	180	62,5	22,0	12,7	1200	136,70

Thermostats p.208-209

STANDARD PRODUCTION

White sablé SB9016 paintwork white brackets
Tolerance ± 3mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 4 BAR

PRODUCTION ON REQUEST

Paintwork to Brem color list with colored brackets
+15/25%

Electric version e.Quar, page 253

STANDARD FITTING REG ø 1/2"


On request: QUAR with depth 5,5 cm and fitting EG ø3/8"

Special fittings page 279




TAPPING CENTRES

MOD. QUAR

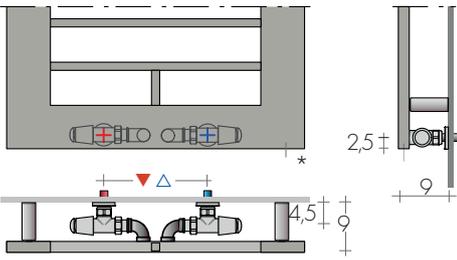


*sleeve E.H.E.
Dual Fuel version


MOD. QUAR-P

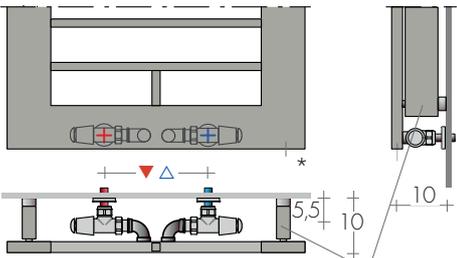

QUAR-P
with radiating tubes at the rear

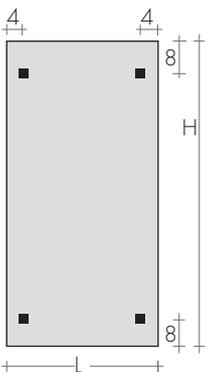

FIXINGS
Brackets included:
B70 for QUAR
B15 for QUAR-P

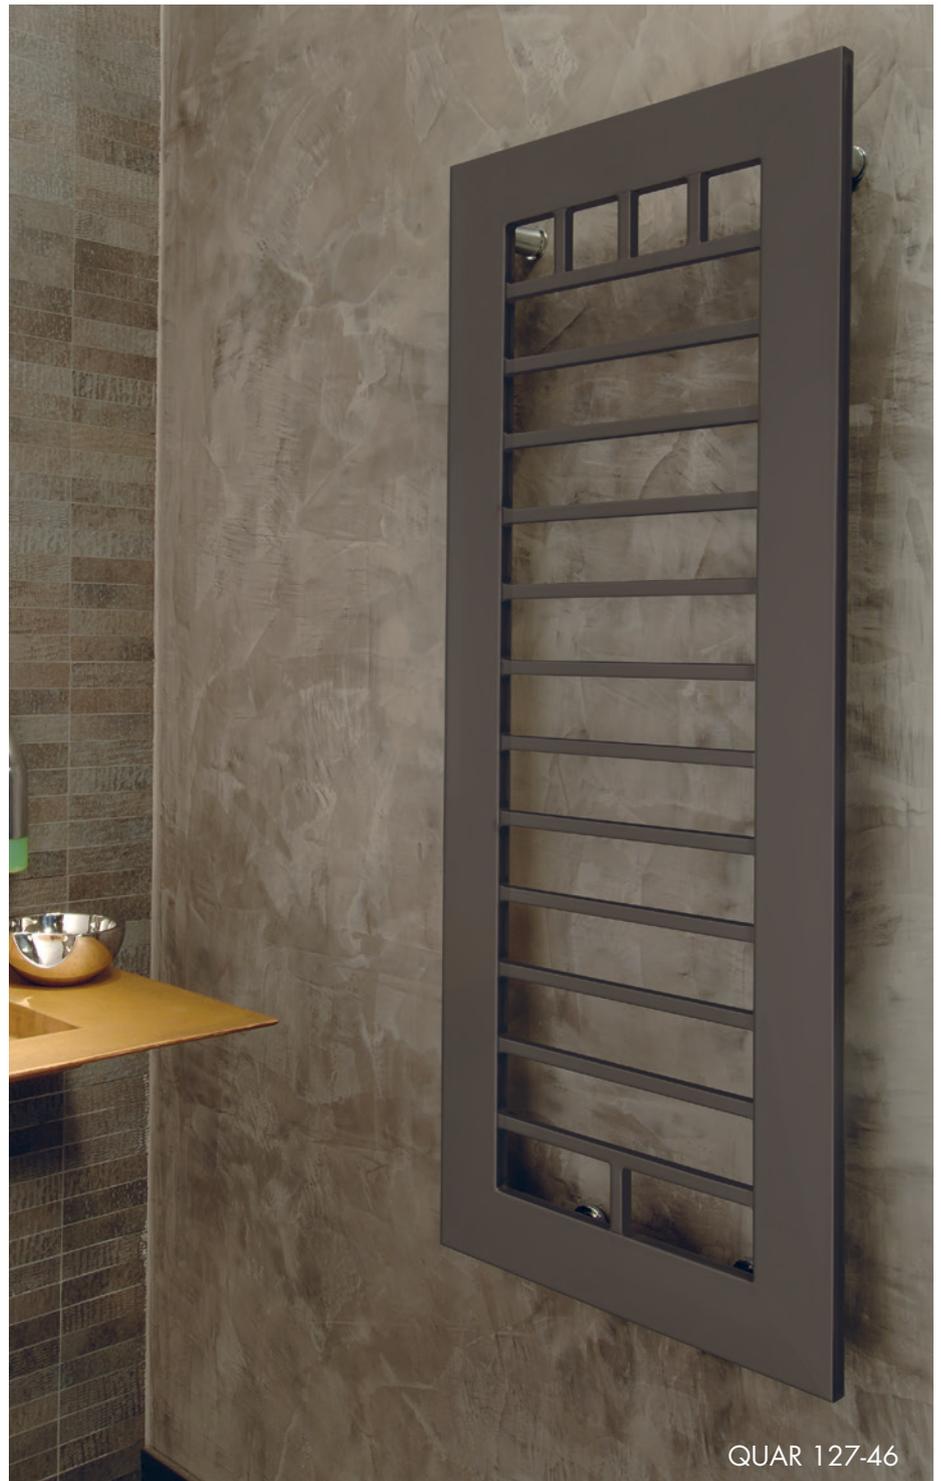

QUAR 127-46

CrossFRAME

RECOMMENDED VALVES

CHROME VALVES KIT with:


- n°2 Valves with tailpieces
- n°2 Fittings (multilayer ø 16, copper ø 12, 14)
- n°2 Chrome wall plates ø 48, hole ø 16



REVERSE QUADRA VALVES KIT
page 271 Art. KQR 180,10€
Extra for BREM color list 53,40€



REVERSE CYL VALVES KIT with thermostatic option,
page 273 Art. KCR 149,90€
Extra for BREM color list 53,40€




REVERSE TON VALVES KIT with THERMOSTATIC
Head page 273 Art. KTR 190,30€

SPECIAL FINISHES

page 267
Finishes Gold, Bronze, Brushed Nickel for 2 valves
Brushed Nickel FITTING KIT extra Art. RN 30,50€

REMOTE FITTINGS

Art. REM 42,10€
Tapping centres: at the rear of radiator ▲▼ L - 6cm
DISTANT Valves page 274

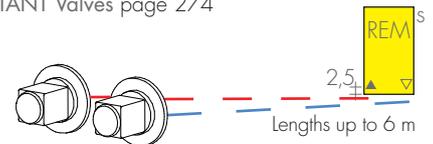

REM

2,5

Lengths up to 6 m