

SHAR

SHAR has all the main characteristics of a traditional heated towel rail. Its aesthetic

harmony arises from the semi-oval shape of the manifolds, which are reduced to minimum

dimensions and with radiating tubes of $\varnothing$ 15 mm, they portray lightness and solidity.


DIMENSIONS

Width 33 / 45 / 50 / 60 / 75 cm


Height 71,8 / 110,3 / 140,6 / 181,8 cm

Depth 3 cm


Depth from wall 10 cm



SHAR 70-...




SHAR 110-...



SHAR 140-...



SHAR 180-...



MODEL	H-L cm	Standard white sablé SB 9016 €	Δt 50K watt	EN 442 Δt 40K watt	Δt 30K watt	▲ ▼ t.c. cm	Height H cm	Width L cm	Weight M Kg	Volume V dm³	DUAL FUEL VERSION with E.H.E. and* Watt €	
SHAR 70-45	70-45	400,00	353	267	181	42	71,8	45	4,9	3,12	400	103,40
SHAR 70-50	70-50	410,90	389	294	200	47	71,8	50	5,3	3,27	400	103,40
SHAR 70-60	70-60	427,10	458	346	235	57	71,8	60	6,1	3,59	500	105,60
SHAR 110-45	110-45	519,70	526	397	270	42	110,3	45	7,4	4,74	500	105,60
SHAR 110-50	110-50	532,90	580	438	298	47	110,3	50	8,0	4,97	650	107,80
SHAR 110-60	110-60	556,50	684	516	352	57	110,3	60	9,2	5,45	650	107,80
Slim SHAR 140-33	140-33	612,00	468	353	241	30	140,6	33	7,3	4,51	500	105,60
SHAR 140-45	140-45	653,50	653	493	336	42	140,6	45	9,3	6,00	650	107,80
SHAR 140-50	140-50	671,30	720	544	370	47	140,6	50	10,0	6,29	800	112,60
SHAR 140-60	140-60	699,90	851	643	437	57	140,6	60	11,6	6,88	900	116,20
Slim SHAR 180-33	180-33	748,00	618	467	318	30	181,8	33	9,7	4,89	650	107,80
SHAR 180-45	180-45	798,80	870	657	447	42	181,8	45	12,2	7,85	900	116,20
SHAR 180-50	180-50	820,70	955	721	491	47	181,8	50	13,2	8,24	900	116,20
SHAR 180-60	180-60	856,60	1126	850	579	57	181,8	60	15,3	9,03	1200	124,50
SHAR 180-75	180-75	912,90	1363	1029	701	72	181,8	75	18,1	10,21	1500	135,40
VERSION - CHROME												
S-CROM 70-50	70-50	941,20	311	235	160	47	71,8	50	5,3	3,27	300	102,20
S-CROM 110-50	110-50	1220,80	464	350	238	47	110,3	50	8,0	4,97	500	105,60
S-CROM 110-60	110-60	1303,90	547	413	281	57	110,3	60	9,2	5,45	500	105,60
S-CROM 140-33	140-33	1400,30	374	282	193	30	140,6	33	7,3	4,51	400	103,40
S-CROM 140-50	140-50	1538,80	576	435	296	47	140,6	50	10,0	6,29	650	107,80
S-CROM 180-33	180-33	1715,20	494	373	254	30	181,8	33	9,7	4,89	500	105,60
S-CROM 180-45	180-45	1836,40	696	526	358	42	181,8	45	12,2	7,85	650	107,80
S-CROM 180-50	180-50	1879,00	764	577	393	47	181,8	50	13,2	8,24	800	112,60

Made-to-measure versions on request Available Stock in standard white

*Dual fuel valve or T to be added p.207
Thermostats p.208-209

MAXIMUM OPERATING PRESSURE 8 BAR

STANDARD PRODUCTION

White "sablé" paintwork-white brackets M8B
Chrome-plated finish with chrome-pl. brackets
Tolerance $\pm$ 3 mm - Air vent $\varnothing$ 1/8"

PRODUCTION ON REQUEST

Paint to Brem color list with
chrome-plated M8C brackets +15/25%
Electric version e.Shar, page 257


STANDARD FITTINGS

EG $\varnothing$ 1/2"
Special fittings, page 279
Shar as a divider, page 202




TAPPING CENTRES

EG vertical standard fittings

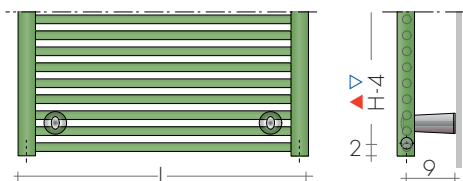

Side fittings on request ▲▼ H-4 cm, ø 1/2"
Extra Art. AS 91,20€

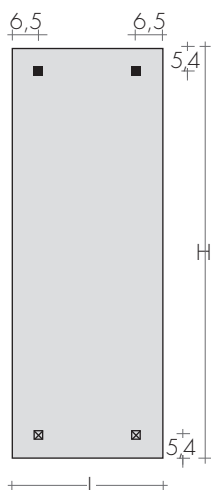

FIXINGS
Brackets included



Art. M8..

☒ SHAR h 180 cm




S-CROM 140-50

RECOMMENDED VALVES

CHROME VALVES KIT with:

- n°2 Valves with tailpieces
- n°2 Fittings (multilayer ø 16, copper ø 12, 14)
- n°2 Chrome wall plates ø 48, hole ø 16




KIT ANGLED VALVES TON
page 269

Art. KVS 137,10€

SPECIAL FINISHES

Finishes Gold, Bronze, Brushed Nickel for 2 valves
Brushed Nickel FITTING KIT extra Art. RN 30,50€

page 267





KIT SIDE control VALVES CYL with THERMOSTATIC
option, page 273 Art. KCL 162,50€
Extra for BREM color list 53,40€

REMOTE FITTINGS

Tapping centres: at the rear of radiator ▲▼ EG
DISTANT Valves page 274

Art. REM 42,10€

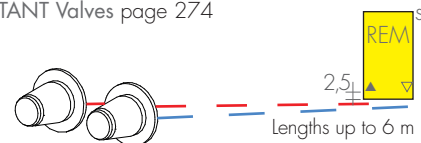

KIT SIDE control VALVES TON with Thermostatic
Head, page 269 Art. KTL 203,70€